


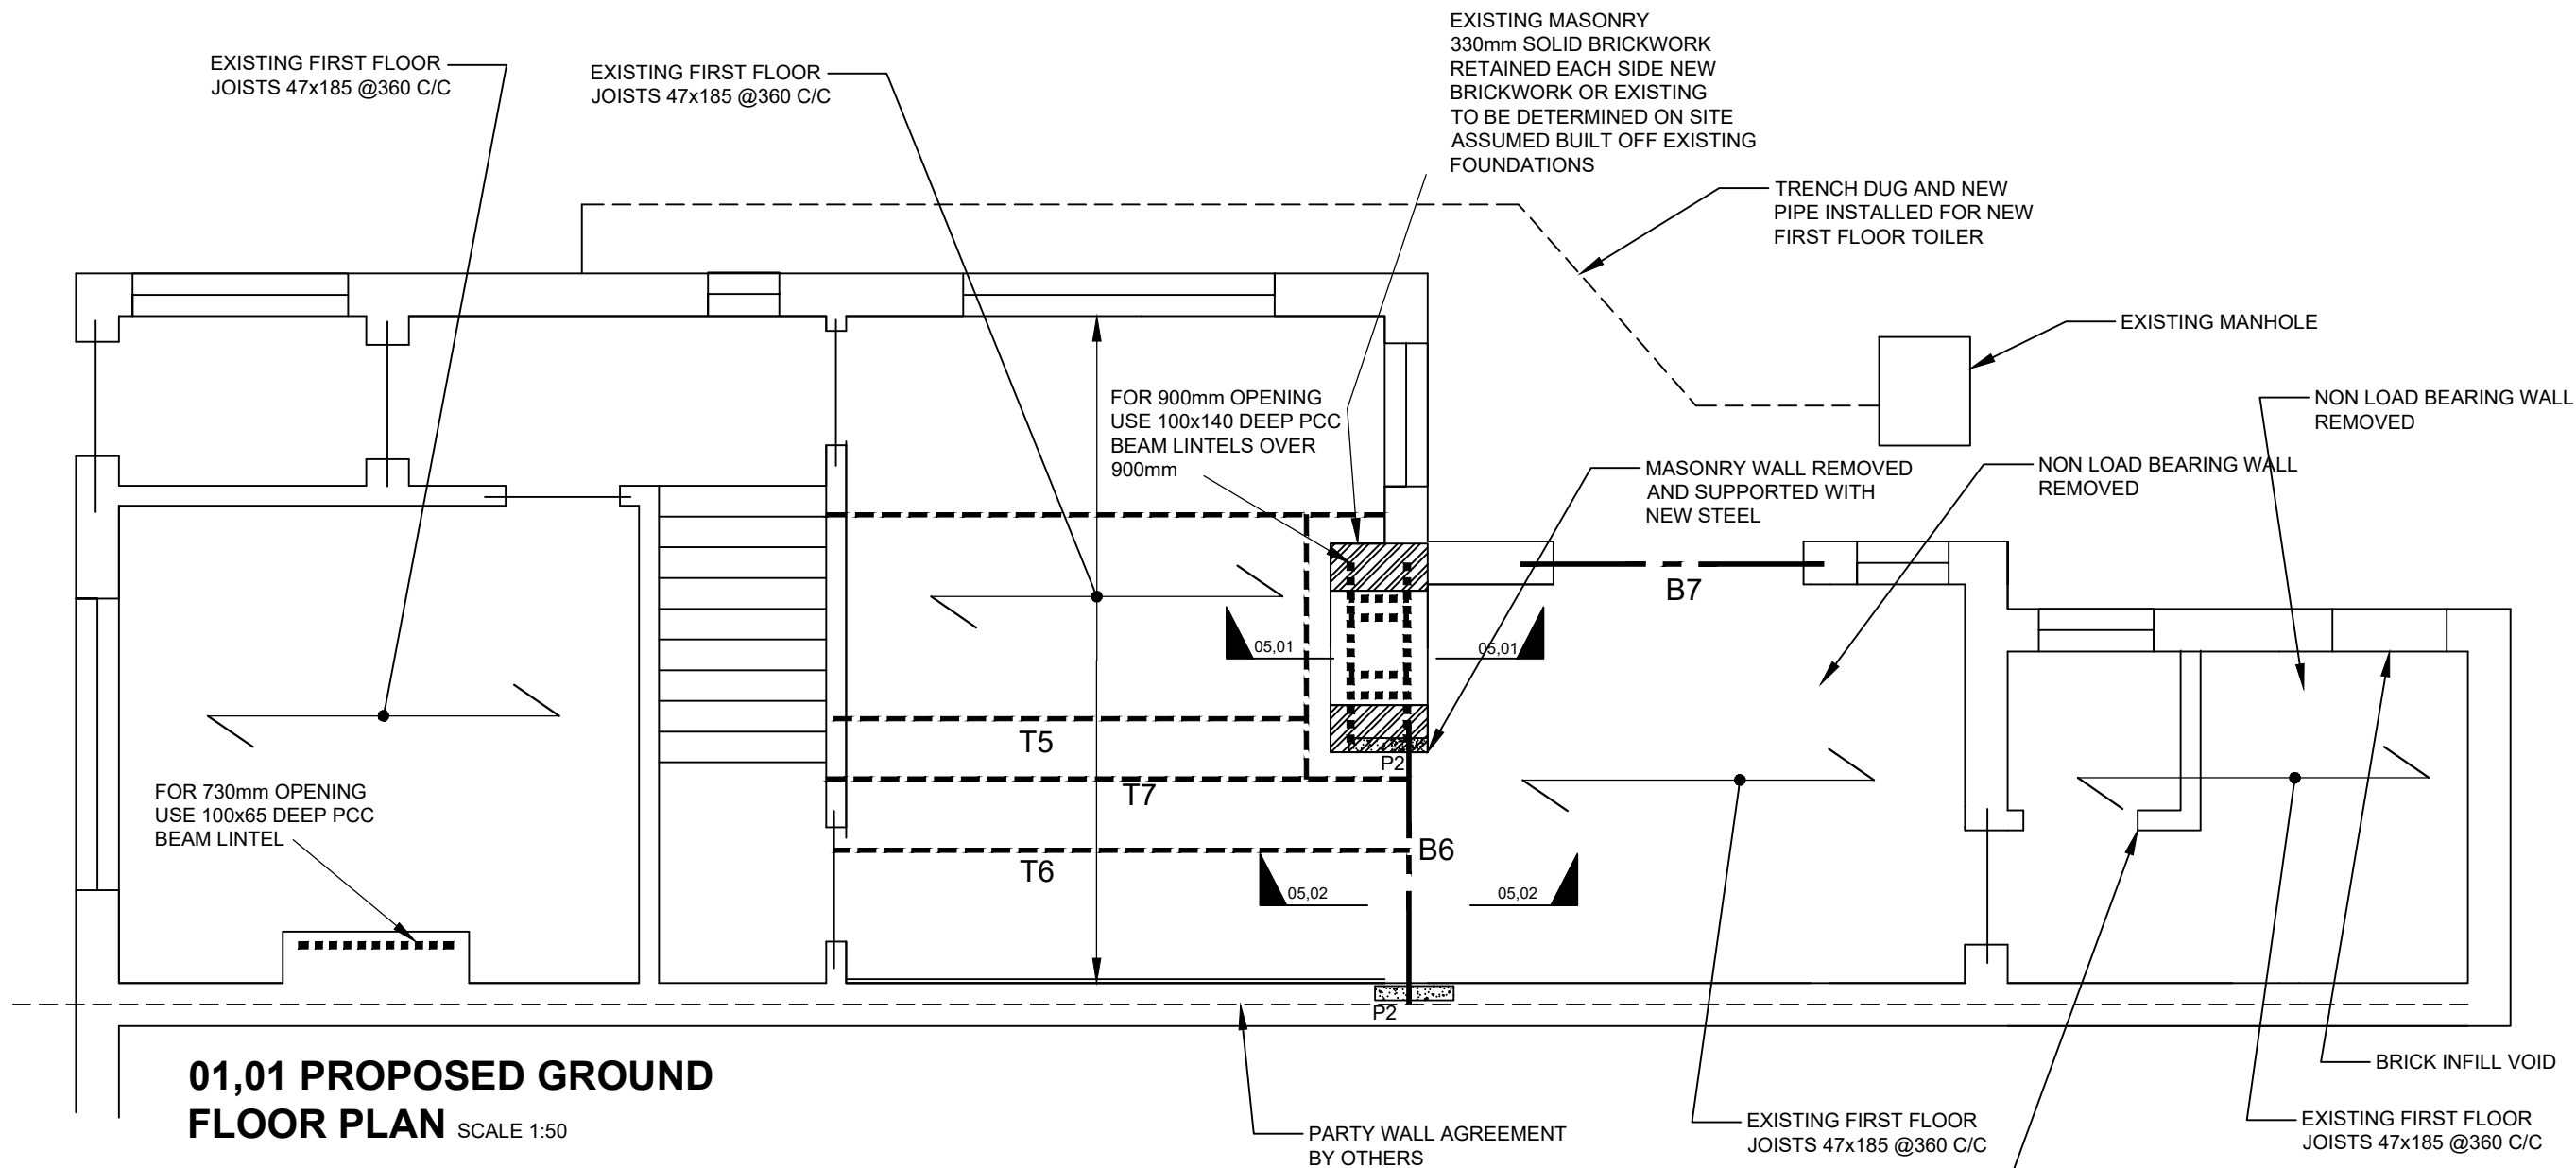

TEMPORARY WORKS TO  
MAIN CONTRACTORS  
METHOD STATEMENT

DO NOT DIRECTLY SCALE  
FROM THIS DRAWING.  
USE SITE DIMENSIONS  
FOR SETTING OUT AND  
ARCHITECTS DRAWINGS

ALL WORK MUST COMPLY WITH THE  
CONSTRUCTION (DESIGN AND MANAGEMENT)  
REGULATIONS 2015 (CDM 2015)

\*  
SEE DETAIL 02,02 FOR SPLICE JOINT AT MAX  $\frac{1}{3}$   
SPAN FROM END BEARING

### CONNECTIONS

ALL TRIMMERS CONNECTED TOGETHER WITH FACE FIXED  
JOIST HANGERS REF SAE BY SIMPSON STRONG TIE OR  
SIMILAR

### END BEARINGS

STEEL BEAM MIN 100mm END BEARING  
UNLESS STATED OTHERWISE  
LINTELS TO HAVE MIN 150mm END BEARING

### TIMBER MEMBERS

**T1,T2,T3,T4**= 2No 47x175 C24 TIMBER BEAMS BOLTED USING  
TIMBER LOK SCREW BOLTS @300 CENTERS STAGGERED  
**T5** = ADDITIONAL 1No 47x185 C24 TIMBER BEAM BOLTED TO  
EXISTING JOIST USING M12 BOLTS @450 CENTERS  
STAGGERED  
**T6,T7**= ADDITIONAL 1No 12x175 STEEL FLITCH PLATE  
BOLTED TO EXISTING JOIST USING M12 BOLTS @ 300  
CENTERS STAGGERED

### STEEL MEMBERS

**B6**= 203x203UC46 S275 STEEL BEAM  
**B7**= USE CATNIC CG 50100 CAVITY LINTEL

### PADSTONES

P2= 550x100x140 DEEP PCC BEAM LINTEL CUT TO SUIT

