


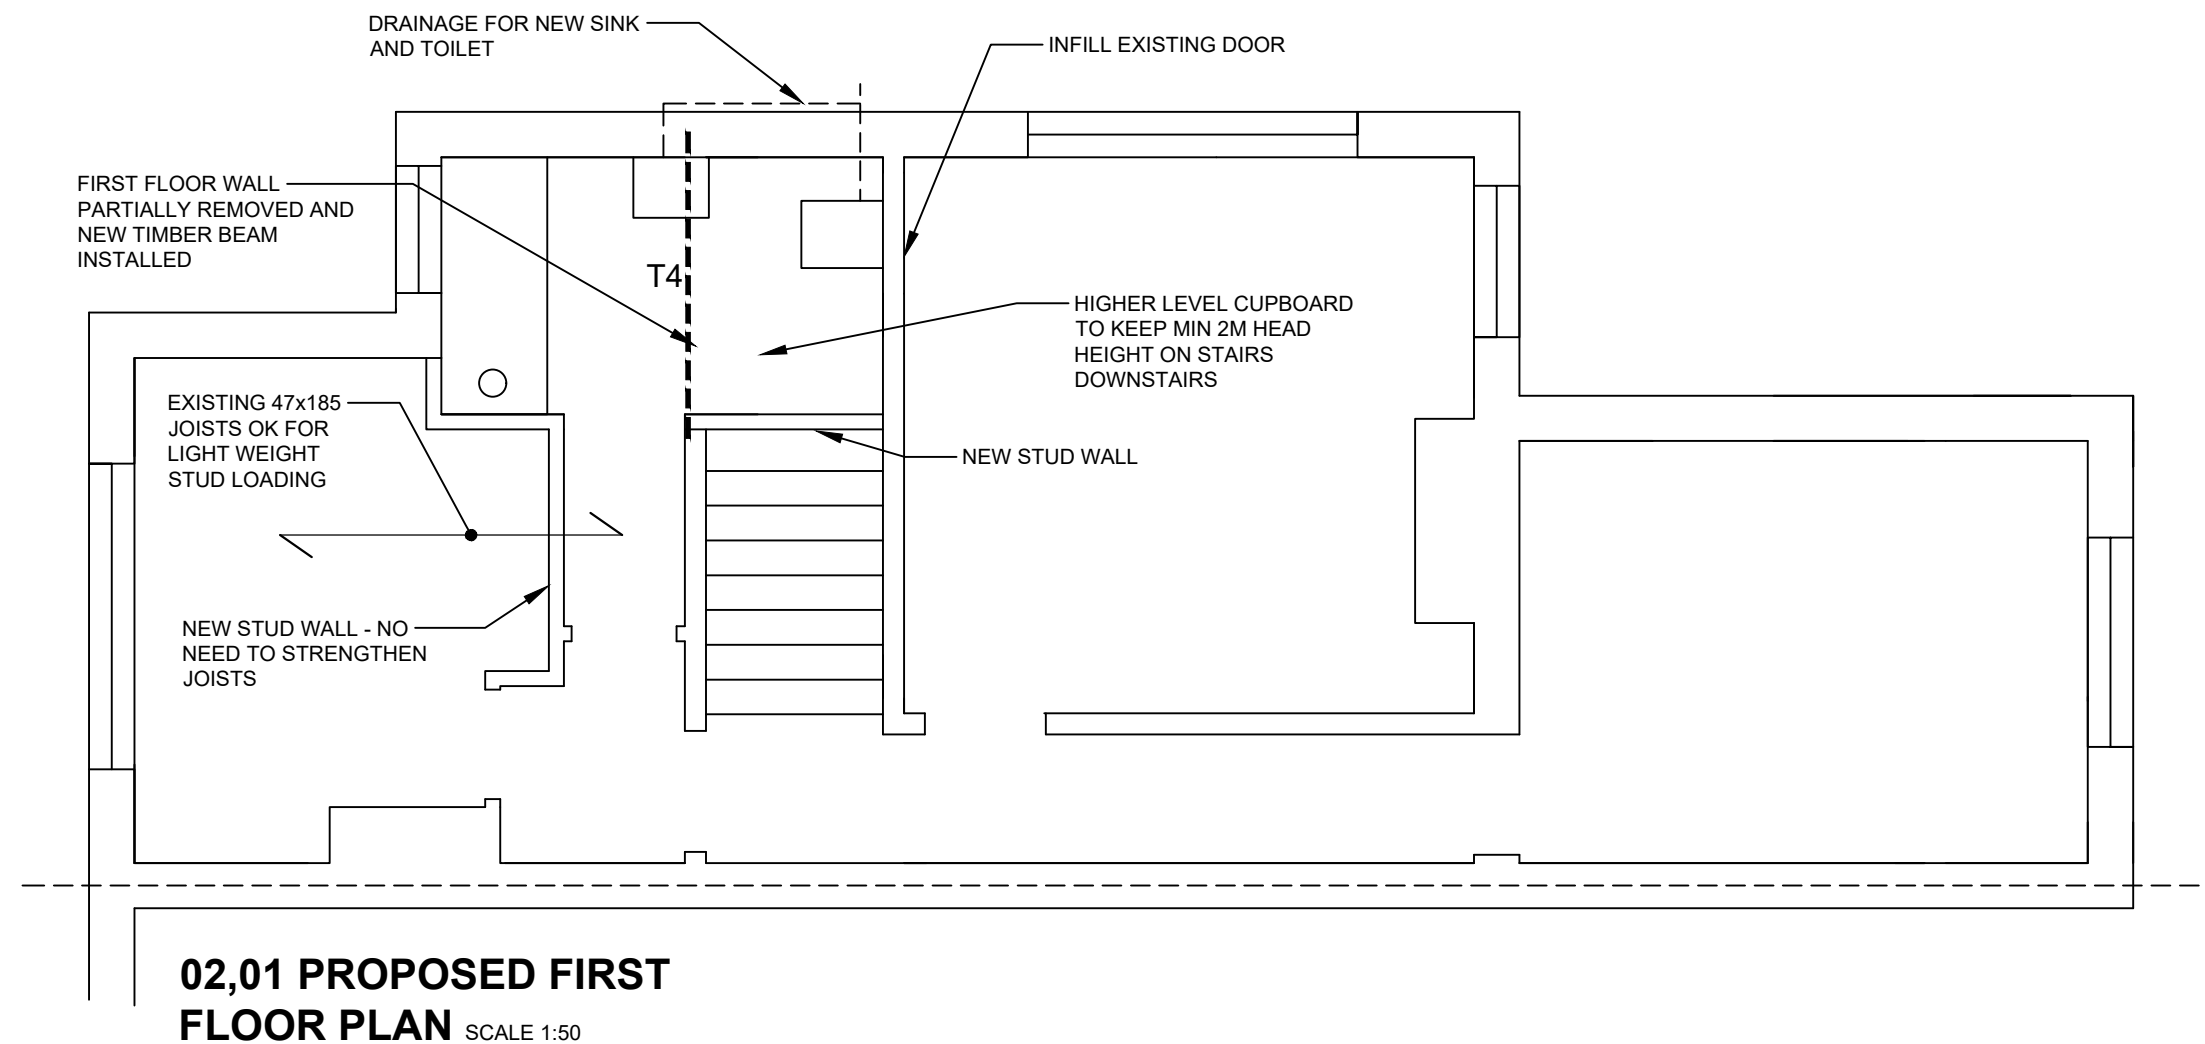

TEMPORARY WORKS TO
MAIN CONTRACTORS
METHOD STATEMENT

DO NOT DIRECTLY SCALE
FROM THIS DRAWING.
USE SITE DIMENSIONS
FOR SETTING OUT AND
ARCHITECTS DRAWINGS

ALL WORK MUST COMPLY WITH THE
CONSTRUCTION (DESIGN AND MANAGEMENT)
REGULATIONS 2015 (CDM 2015)

WHERE STATED NEW STUD PROVIDE NEW
C24 47x75 TIMBER POSTS @ 400 CENTERS

CONNECTIONS

ALL TRIMMERS CONNECTED TOGETHER WITH FACE FIXED JOIST HANGERS REF SAE BY
SIMPSON STRONG TIE OR SIMILAR

END BEARINGS

STEEL BEAM MIN 100mm END BEARING
UNLESS STATED OTHERWISE
LINTELS TO HAVE MIN 150mm END BEARING

TIMBER FLOOR JOISTS

J1 = NEW SECOND FLOOR JOISTS 1No 47x175 C24 TIMBER BEAMS PLACED IN BETWEEN
EXISTING CEILING JOISTS AT 360 CENTERS

TIMBER MEMBERS

T4= 2No 47x175 C24 TIMBER BEAMS BOLTED USING TIMBER LOK SCREW BOLTS @300
CENTERS STAGGERED

JO.