


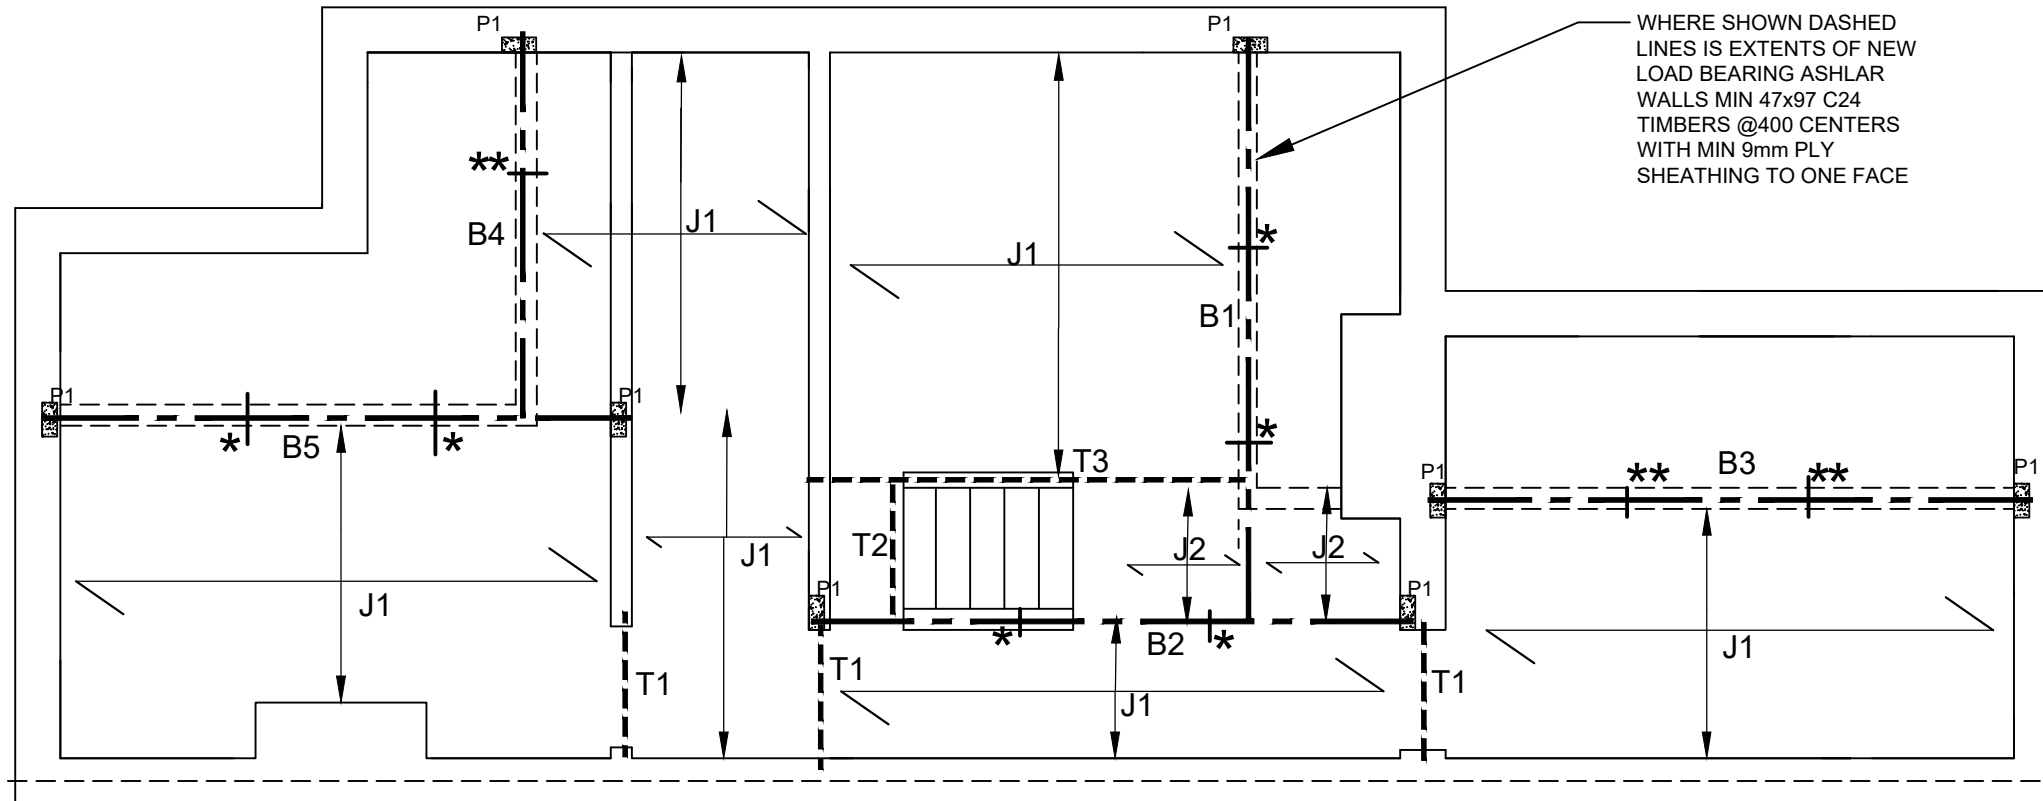

03,01 PROPOSED LOFT FLOOR PLAN

SCALE 1:50

TEMPORARY WORKS TO
MAIN CONTRACTORS
METHOD STATEMENT

DO NOT DIRECTLY SCALE
FROM THIS DRAWING.
USE SITE DIMENSIONS
FOR SETTING OUT AND
ARCHITECTS DRAWINGS

ALL WORK MUST COMPLY WITH THE
CONSTRUCTION (DESIGN AND MANAGEMENT)
REGULATIONS 2015 (CDM 2015)

*
SEE DETAIL 05,03 FOR SPLICE JOINT AT MAX $\frac{1}{3}$
SPAN FROM END BEARING

**
SEE DETAIL 05,04 FOR SPLICE JOINT AT MAX $\frac{1}{3}$
SPAN FROM END BEARING

CONNECTIONS

ALL TRIMMERS CONNECTED TOGETHER WITH FACE FIXED JOIST HANGERS REF SAE BY
SIMPSON STRONG TIE OR SIMILAR

END BEARINGS

STEEL BEAM MIN 100mm END BEARING
UNLESS STATED OTHERWISE
LINTELS TO HAVE MIN 150mm END BEARING

TIMBER FLOOR JOISTS

J1 = NEW SECOND FLOOR JOISTS 1No 47x175 C24 TIMBER BEAMS PLACED IN BETWEEN
EXISTING CEILING JOISTS AT 360 CENTERS

TIMBER MEMBERS

T1,T2,T3,T4= 2No 47x175 C24 TIMBER BEAMS BOLTED USING TIMBER LOK SCREW BOLTS
@300 CENTERS STAGGERED
T5 = ADDITIONAL 1No 47x185 C24 TIMBER BEAM BOLTED TO EXISTING JOIST USING M12
BOLTS @450 CENTERS STAGGERED
T6,T7= ADDITIONAL 1No 12x175 STEEL FLITCH PLATE BOLTED TO EXISTING JOIST USING
M12 BOLTS @ 300 CENTERS STAGGERED

STEEL MEMBERS

B1,B2,B5= 152x152UC23 S275 STEEL BEAM
B3&B4= 152x89UB16 S275 STEEL BEAM
B6= 203x203UC46 S275 STEEL BEAM

PADSTONES

P1 = 225x100x65 DEEP PCC BEAM LINTEL CUT TO SUIT OR STEEL BEARING PLATE
200x100x10

